


HIGH-TRO-REEL (Non-Tension Type) Indoor Use Insulated Trolleys UL Listed

60A High-Tro-Reel unit (for indoor use only)

UL Listed 

- Rating 3P, 4P, 5P, 6P at 600V, 60A
- Conductor materials Copper (8mm) + Copper (20mm)
- Insulating sheath material Rigid PVC (heat resistance: 75°C)
Orange (hazard color),
Munsell 2.5YR 6/13

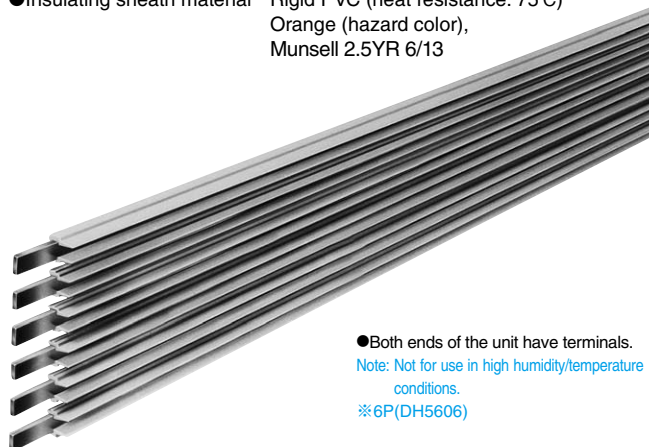

- Both ends of the unit have terminals.
- Note: Not for use in high humidity/temperature conditions.
- ※ 6P(DH5606)

Cat. No.	Rating	Standard length	Weight (kg)	Units per box	Units per carton
DH5603	3P600V60A	3m	3.13	—	5
DH5604	4P600V60A	3m	4.18	—	5
DH5605	5P600V60A	3m	5.22	—	5
DH5606	6P600V60A	3m	6.27	—	5

● 60A units longer than 2997mm are available by special order (up to 6m)

Center feed-in joiner

UL Listed 

Used to supply power. Also used to connect the High-Tro-Reel units.

- Note: Cannot be used as an end feed.
- ※ 5P(DH5615K)



Cat. No.	Rating	A	Weight (kg)	Units per box	Units per carton
DH5613K	3P600V60A	65	0.35	1	10
DH5614K	4P600V60A	85	0.46	1	10
DH5615K	5P600V60A	105	0.56	1	10
DH5616K	6P600V60A	125	0.66	1	10

Center feed-in joiner (side-cable type)



Used to supply power. Also used to connect the High-Tro-Reel units.

- Note: UL Approval Pending
- Note: Cannot be used as an end feed.
- ※ 4P(DH56141K)




Cat. No.	Rating	A	Weight (kg)	Units per box	Units per carton
DH56131K	3P600V60A	65	0.35	—	1
DH56141K	4P600V60A	85	0.46	—	1
DH56151K	5P600V60A	105	0.56	—	1
DH56161K	6P600V60A	125	0.66	—	1

● Cross-section

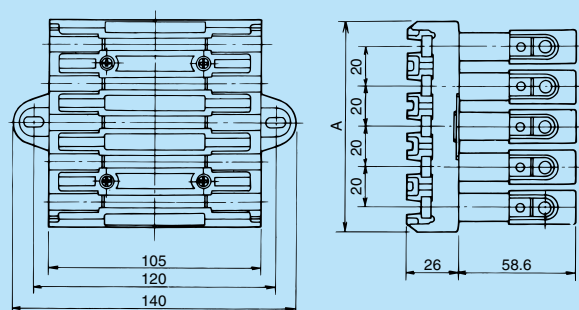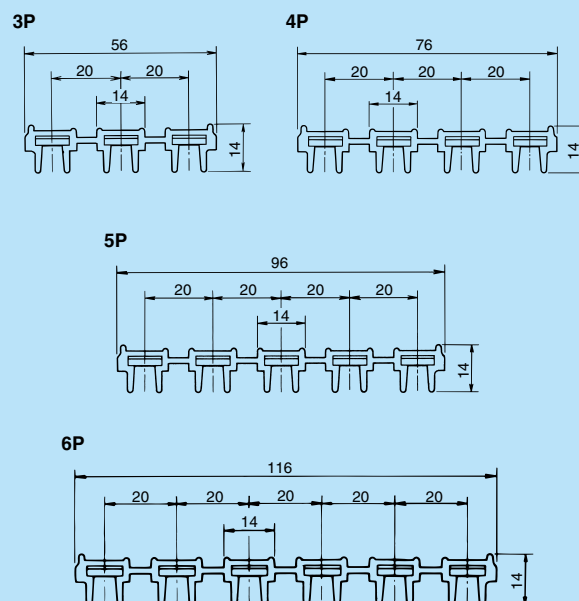

Drawing shows a 5P joiner.

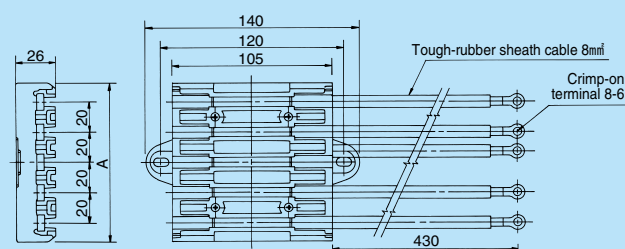

Drawing shows a 5P joiner.