


HIGH-TRO-REEL (Tension Type)

3P·4P 60A UL Listed (UL)

Note: Refer to page 43 for the products with CE Mark.

60A/90A High-Tro-Reel units (for indoor use only)

- Rating 3P, 4P, 5P; 600V; 60A, 90A
- Conductor materials 60A: Steel (8mm²) + Copper (20mm²), 90A: Copper (28mm²)
- Insulating sheath material Rigid PVC (heat resistance: 75°C)
Orange (hazard color),
Munsell 2.5YR 6/13

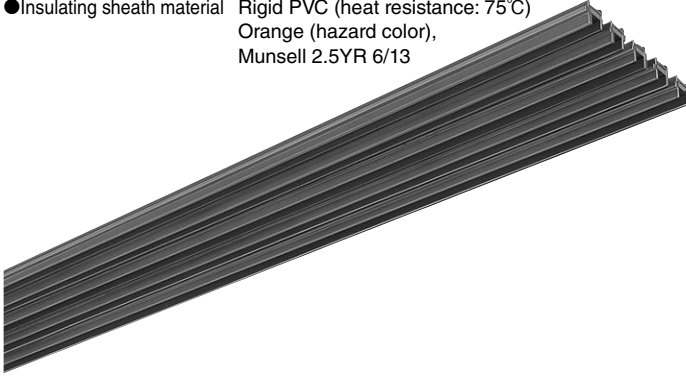

※5P(DH5767)

60A

Cat. No.	Rating	Length	Weight (kg)
DH5761	3P·600V·60A	10m	10.2
DH5763		30m	30.5
DH5765		50m	50.9
DH5762	4P·600V·60A	10m	13.8
DH5764		30m	41.5
DH5766		50m	69.1
DH5767	5P·600V·60A	10m	17.1
DH5768		30m	51.3
DH5769		50m	85.4


60A (UL Listed (UL))

Cat. No.	Rating	Length	Weight (kg)
DH5761U	3P·600V·60A	10m	10.2
DH5763U		30m	30.5
DH5765U		50m	50.9
DH5762U	4P·600V·60A	10m	13.8
DH5764U		30m	41.5
DH5766U		50m	69.1

※Available in coil form only. Contact us in case of non-standard length.

150A/200A High-Tro-Reel units (for indoor use and machine interior use only)

- Rating 3P, 4P; 600V; 150A, 200A
- Conductor material 150A/200A: Copper (46.2mm²)
- Insulating sheath materials 150A: Rigid PVC (heat resistance: 75°C)
200A: Rigid PVC (heat resistance: 95°C)
Orange (hazard color),
Munsell 2.5YR 6/13

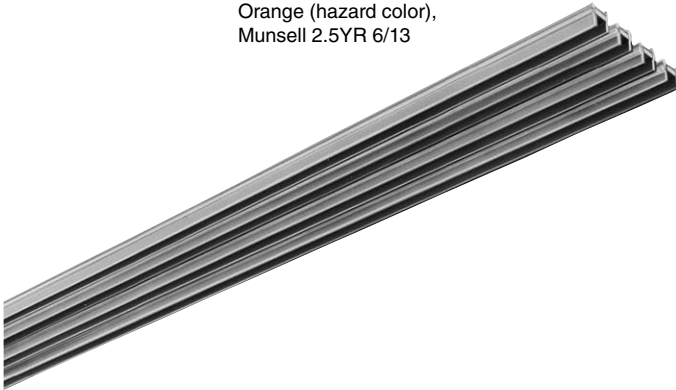

※4P(DH5752)


150A

Cat. No.	Rating	Length	Weight (kg)
DH5751	3P·600V·150A	10m	15.2
DH5753		30m	45.5
DH5755		50m	75.8
DH5752	4P·600V·150A	10m	20.4
DH5754		30m	61.1
DH5756		50m	101.8


※Available in coil form only. Contact us in case of non-standard length.

●Cross-section


3P60A




3P90A




4P60A




4P90A



5P60A



5P90A




90A

Cat. No.	Rating	Length	Weight (kg)
DH5791	3P·600V·90A	10m	10.6
DH5793		30m	31.7
DH5795		50m	52.8
DH5792	4P·600V·90A	10m	14.2
DH5794		30m	42.6
DH5796		50m	71.0
DH5797	5P·600V·90A	10m	17.9
DH5798		30m	53.6
DH5799		50m	89.3


※Available in coil form only. Contact us in case of non-standard length.

●Cross-section


3P150A




3P200A



4P150A



4P200A



200A

Cat. No.	Rating	Length	Weight (kg)
DH5731	3P·600V·200A	10m	15.2
DH5733		30m	45.5
DH5735		50m	75.8
DH5732	4P·600V·200A	10m	20.2
DH5734		30m	60.5
DH5736		50m	100.8

※Available in coil form only. Contact us in case of non-standard length.